

«SMOPYC BRONZE AWARD 2021»


NOVEDADES EN EQUIPAMIENTO, COMPONENTES Y MEDIOS AUXILIARES
 INNOVATIONS IN EQUIPMENT, COMPONENTS AND AUXILIARY MEANS



XR 122



| TECHNICAL SPECIFICATIONS | | XR122 |
|--|-------|-----------|
| Excavator weight | Tons | 100 - 140 |
| Ripper operating weight (incl. top bracket) | kg | 15.950 |
| Ripper operating weight (top bracket not included) | kg | 14.000 |
| Hydraulic working pressure | MPa | 30 |
| Hydraulic oil flow | L/min | 500 |
| Frecuency | 1/min | 600 |

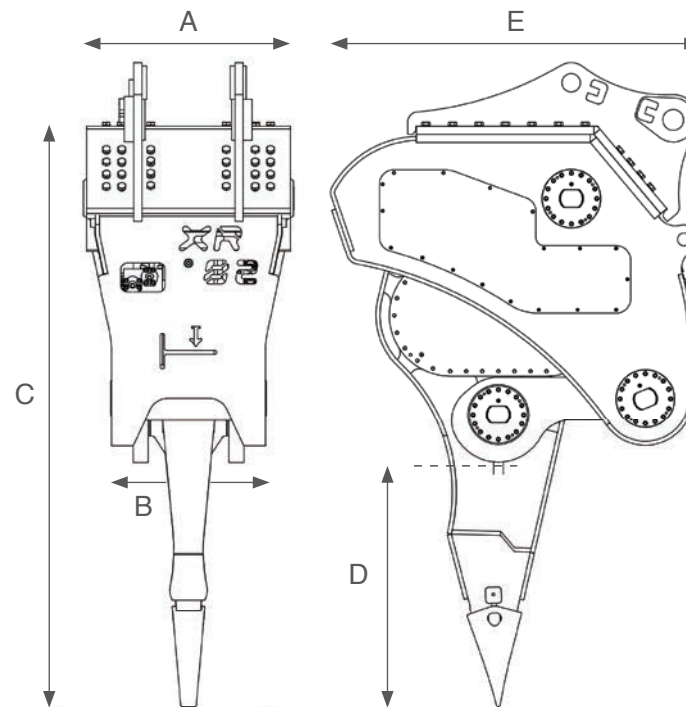

| XR122 | |
|----------|-------|
| A | 1.270 |
| B | 1.080 |
| C | 4.150 |
| D | 1.780 |
| E | 2.600 |

* Dimensions in millimeters.

XCENTRIC RIPPER INTERNATIONAL, S.L.

Arriurdina, 15 • 01015 Vitoria-Gasteiz (Spain) • Tel.: +34 945 290 555

www.xcentricripper.com